

SILENTCLICK

ACOUSTIC RATING

STC 58 / Rw 58(-4;-11)dB

STANDARD WALL THICKNESS

5.4" / 13.6 cm

SINGLE PANEL WIDTH

23.6" / 60 cm center to center

24.3" / 61.8 cm full width

WALL PANEL HEIGHT MAXIMUM

109.6" / 278.5 cm

or 137.8" / 350 cm

INSULATION THICKNESS

1.9" / 5 cm

INSULATION DENSITY

2.1 lb per cubic foot

33 kg per cubic meter

WALL CAVITY DEPTH

3" / 7.5 cm

TOLERANCE – WALL HEIGHT ADJUSTABILITY

± 0.8" / 2 cm

PANEL FINISH OPTIONS

White

Black

Custom


Wood

SYSTEM INTEGRATIONS

Holes (40x40mm) for electrical wiring and plumbing are provided. Outlets can be easily installed in panels by making a hole and fix it in the usual way.

STANDARD DOOR TYPE

Aluminum doorframe with acoustic wooden door and dropseal.

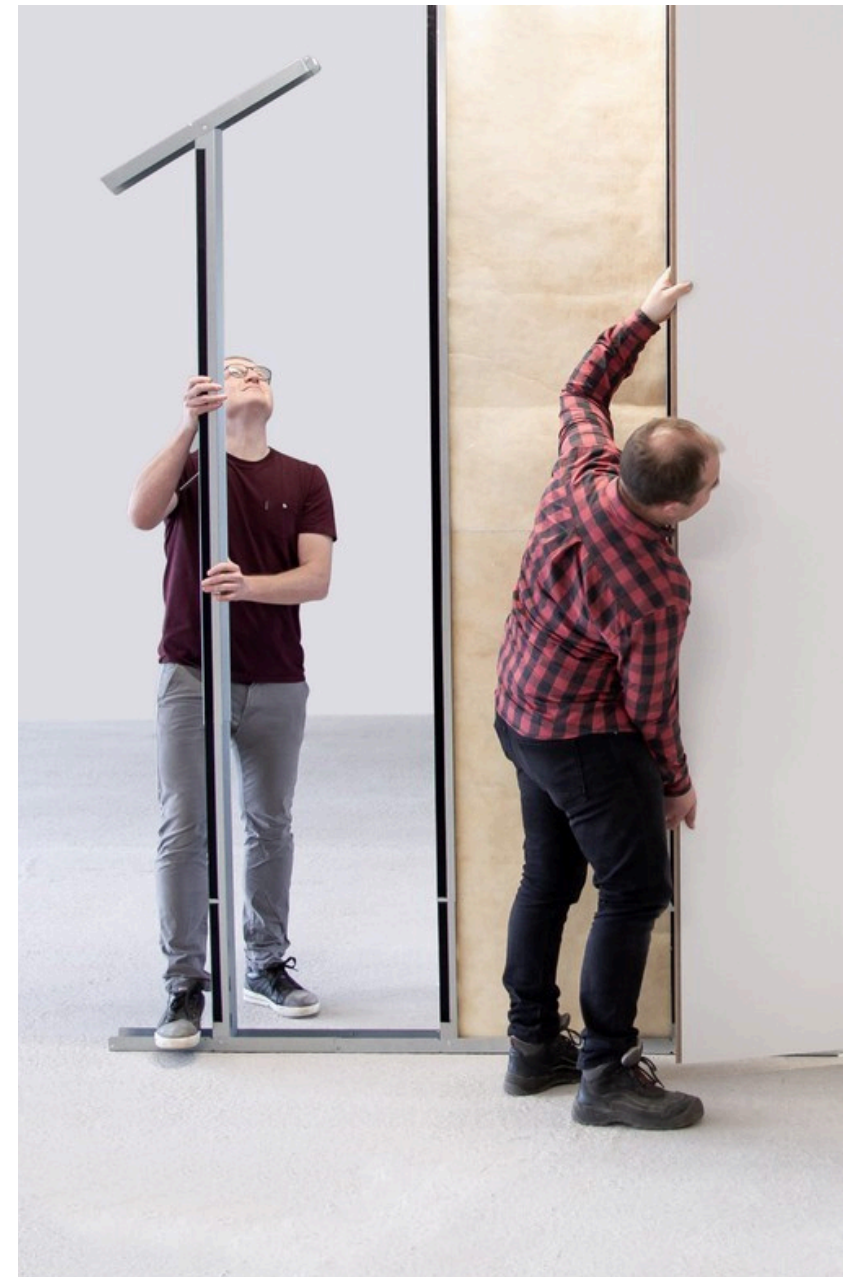

JUUNOO